

# Check Weigher CW 600HSA

For on Line High Speed  
Dynamic Weighing



- ❖ High Speed with High Accuracy
- ❖ 100 Product Memory
- ❖ Height Adjustment for Ease of Integration with Existing Lines
- ❖ Variable Conveyor Speed Control to Match the Inlet Speed
- ❖ Facility for Dynamic Weight Compensation
- ❖ Display of Net Weight
- ❖ Statistical Data of Total Accept, Total Reject, Standard Deviation,
- ❖ Percentage of Rejection, Range value etc., on Graphic LCD display



TECHNOFOUR ELECTRONICS PVT. LTD.

## Check Weigher CW 600HSA

uses the state of the art technology to achieve greater accuracy in dynamic weighing at high speed. The system provides 100% online weighing, ensuring compliance with international standards of pharmaceutical, food, chemical and cosmetic industries.

Check Weigher CW 600HSA also improves production line profitability through significant reduction in product - give - away. The entire system is made from SS and designed for easy removal for cleaning purposes.

## FEATURES

Height Adjustment for Ease of Integration with Exiting Line

Variable Conveyor Speed Control to Match the Inlet Speed

Facility for Dynamic Weight Compensation

Display of Net Weight

Statistical Data of Total Accept, Total Reject, Standard Deviation

Percentage of Rejection, Range value etc., on Graphic LCD display

## Optional

Hand Held Terminal (with pc software) for data storage and transfer to Computer inkjet printer connectivity

Other model upto 400packs/min can also be provided

## TECHNICAL SPECIFICATIONS

Model : CW 600 HSA

Weighing Range : 1 g to 500 g

Belt Height from Floor : 720 mm + 100 mm

Weighing Conveyor Platform : 250 mm Long  
: 200 mm Wide

Conveyor Belt : 135 mm (width)

Overall System Length : 1150 mm

Sensor : Weigh Cell (EMFC)

Resolution : 0.05 g


Rejection Mechanism : Air nozzle

Display : Graphic LCD / HMI

Power Requirement : Single Phase 220V AC / 50Hz /  
200VA

Pneumatic Requirement : 6 Kgs / cm<sup>2</sup> for all  
rejection mechanisms

\* Due to continuous development, specifications subject to change without notice.

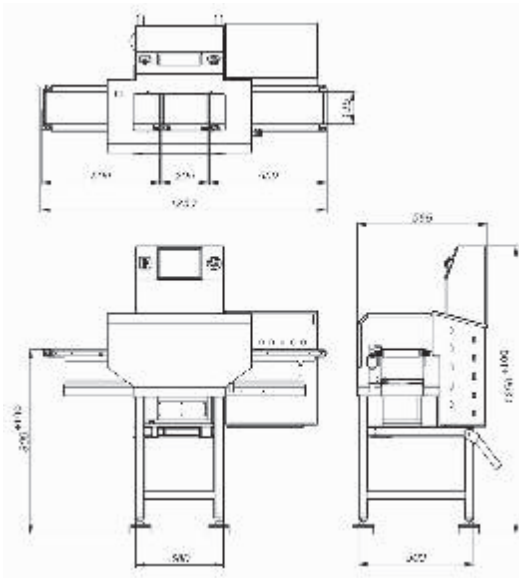

## TECHNOFOUR ELECTRONICS PVT. LTD.

Gat No.3(PT), 5(PT), 243(PT), Kasurdi (Kheba), Khed Shivapur-  
Saswad Road, Post : Khed Shivapur, Taluka : Bhor,  
District : Pune 412 205. Maharashtra, India.

Tel : + 91-2113-305200, 305246 Fax : + 91-2113-305250

Email : pcssales@tepl.co.in, teplinbox@gmail.com

Website : www.teplindia.com